


Wire harness for SCHURTER products

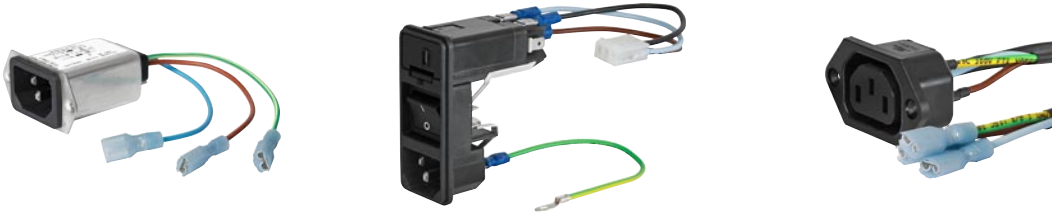

5120 filter inlet with wire harness

KD power entry module with wire harness

6600 outlet with wire harness

Description

- Customer specific wire harness to SCHURTER products
- Push mounted, soldered or screwed-on, from rear-side

Weblinks

[pdf](#), [html](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Accessories](#)

Wire Harnessing

The wire harness service includes several types of ready to install wires, cables or wire harnesses with custom specific end terminal connections. The SCHURTER products such as IEC 60320 connectors, power entry modules or filter products with quick connect, solder or screw on terminals can be assembled with customer specific interconnection solutions.


The offered solution includes the specific selected SCHURTER product inclusive the individual configured wire harness.

Customer specific wire harness request:

<http://www.schurter.ch/en/Components/Connectors/Wire-Harness-Request>

Dimensions

Schematics of a SCHURTER wire harness

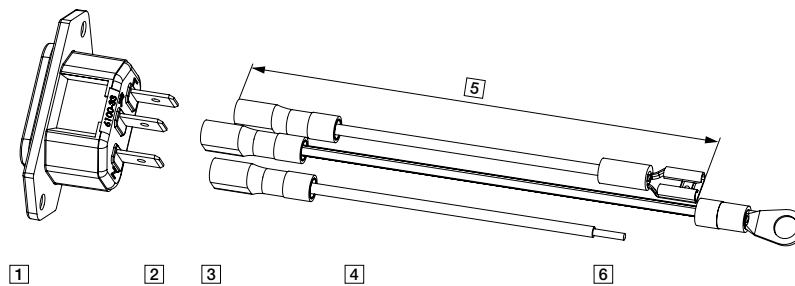

1) SCHURTER Type, 2) Terminal, 3) Wire terminal SCHURTER part, 4) Wire typ and color, 5) Wire length, 6) Wire terminal free end

Variants

Suitable for	Description	Flexible wire length (mm)	interconnection	Description / Wire end terminals	Order Number
CD, C20F, DC11, DC12, DD11, DD12, EC11, EC12, KD, KEA, KFA, KM, KMF, 2572, 4710, 4719, 4793, 4797, 4798, 5086, 5110, 5120, 5130, 5707, 6100-3, 6100-4, 6600-3, 6600-4, 6762, 6765	flexible wire, standard	150	AWG16	L, N, PE, flexible wire, stripped	5120.0057.0
CD, C20F, DC11, DC12, DD11, DD12, EC11, EC12, KD, KEA, KFA, KM, KMF, 2572, 4710, 4719, 4793, 4797, 4798, 5086, 5110, 5120, 5130, 5707, 6100-3, 6100-4, 6600-3, 6600-4, 6762, 6765	flexible wire, standard	150	AWG18	L, N, PE, flexible wire, stripped	5120.0343.0
CD, C20F, DC11, DC12, DD11, DD12, EC11, EC12, KD, KEA, KFA, KM, KMF, 2572, 4710, 4719, 4793, 4797, 4798, 5086, 5110, 5120, 5130, 5707, 6100-3, 6100-4, 6600-3, 6600-4, 6762, 6765	flexible wire, standard	150	AWG18	L, N, PE, flexible wire, stripped	5120.1046.0
CD, C20F, DC11, DC12, DD11, DD12, EC11, EC12, KD, KEA, KFA, KM, KMF, 2572, 4710, 4719, 4793, 4797, 4798, 5086, 5110, 5120, 5130, 5707, 6100-3, 6100-4, 6600-3, 6600-4, 6762, 6765	flexible wire, standard	150	AWG18	L, N, PE, flexible wire, stripped	5120.1346.0
CD, C20F, DC11, DC12, DD11, DD12, EC11, EC12, KD, KEA, KFA, KM, KMF, 2572, 4710, 4719, 4793, 4797, 4798, 5086, 5110, 5120, 5130, 5707, 6100-3, 6100-4, 6600-3, 6600-4, 6762, 6765	flexible wire, standard	150	AWG18	L, N, PE, flexible wire, stripped	5120.2046.0
CD, C20F, DC11, DC12, DD11, DD12, EC11, EC12, KD, KEA, KFA, KM, KMF, 2572, 4710, 4719, 4793, 4797, 4798, 5086, 5110, 5120, 5130, 5707, 6100-3, 6100-4, 6600-3, 6600-4, 6762, 6765	flexible wire, standard	150	AWG18	L, N, PE, flexible wire, stripped	5120.3034.0
http://www.schurter.ch/pdf/english/typ_.pdf	DC11 G-STECKER-KOMBI 10A	150	AWG18	L, N, PE, quick connect 4.8x0.8 mm, insulated	DC11.0001.003

The listed variants are often used.

For individual wire harness configurations select: test.schurter.ch/en/Components/Connectors/Wire-Harness-Request/